





200 Series
Sconce/Pendant
VodeRail & Bee+Rail T5



200 Series Surface/Pendant for T5HE or T5HO fluorescent. Ceiling, wall (ADA), or suspension mount. Single or double rail option. 2'(61cm) or 3'(91.5cm) rail lengths available. Patented hub design allows for 370° rotation with lock-screw. Mounts to any standard junction box or can be direct wired without jbox. Brushed aluminum finish standard.

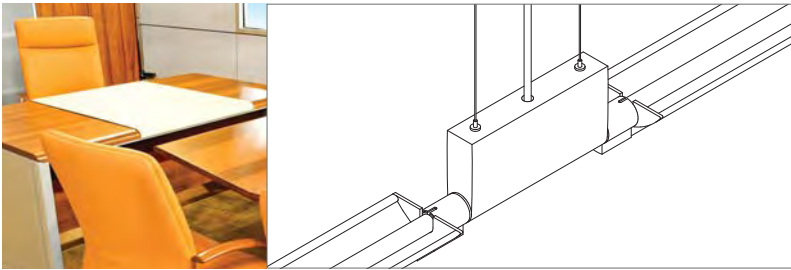

BowPerf










WingRail



200 Series




Sconce/Pendant

VodeRail & Bee+Rail T5 - Example Configurations

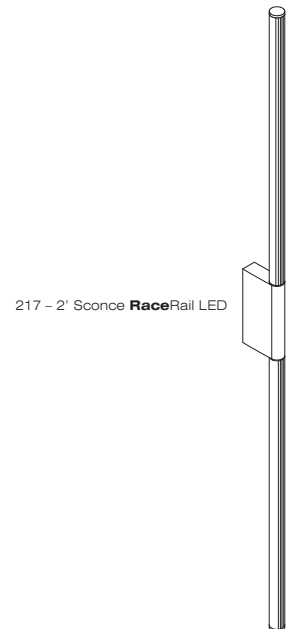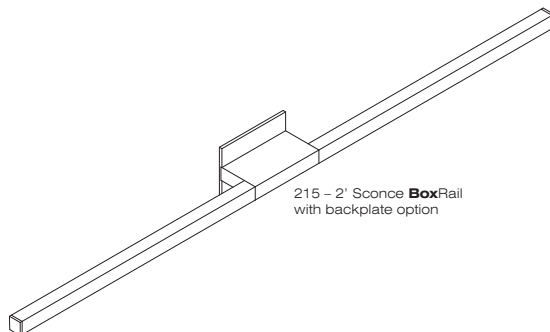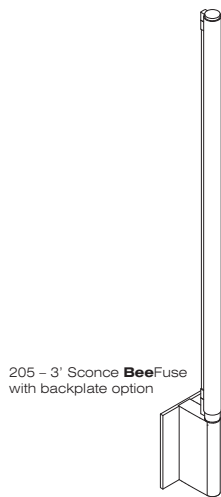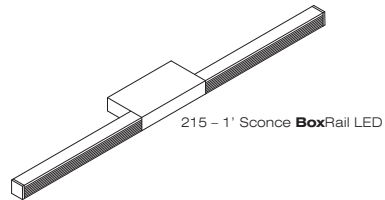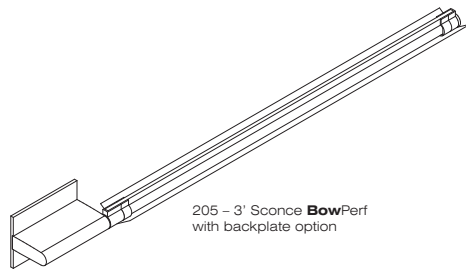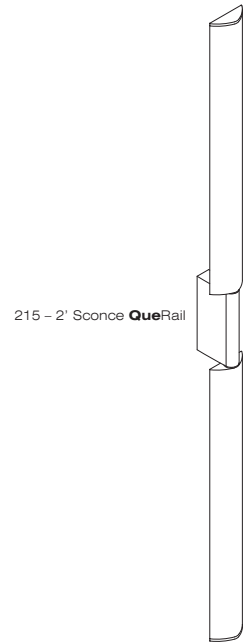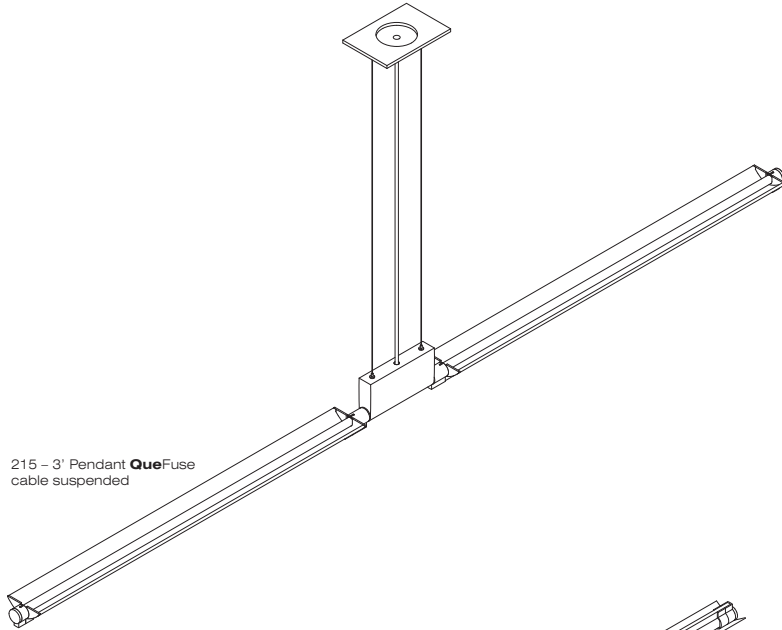



200 Series
Sconce/Pendant
VodeRail & Bee+Rail T5 - Rail Types

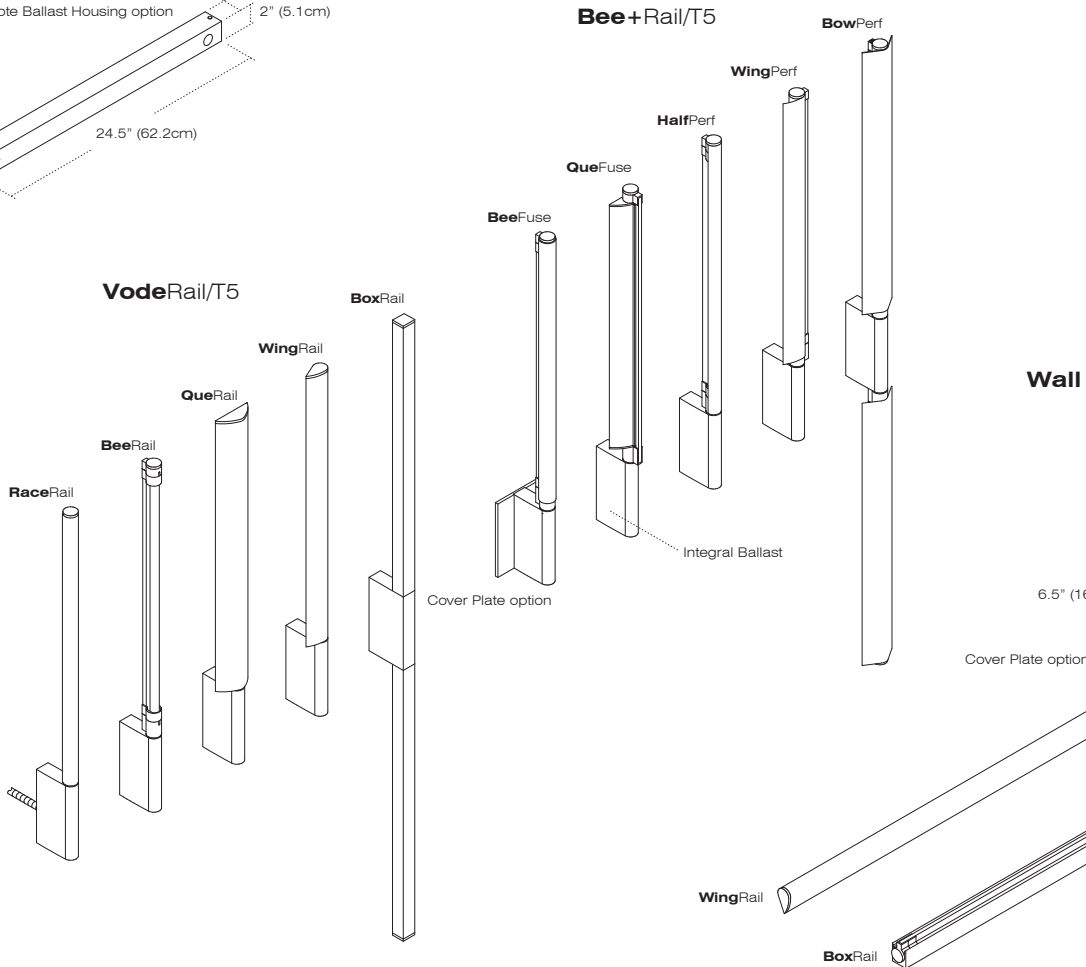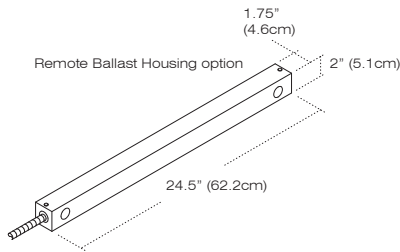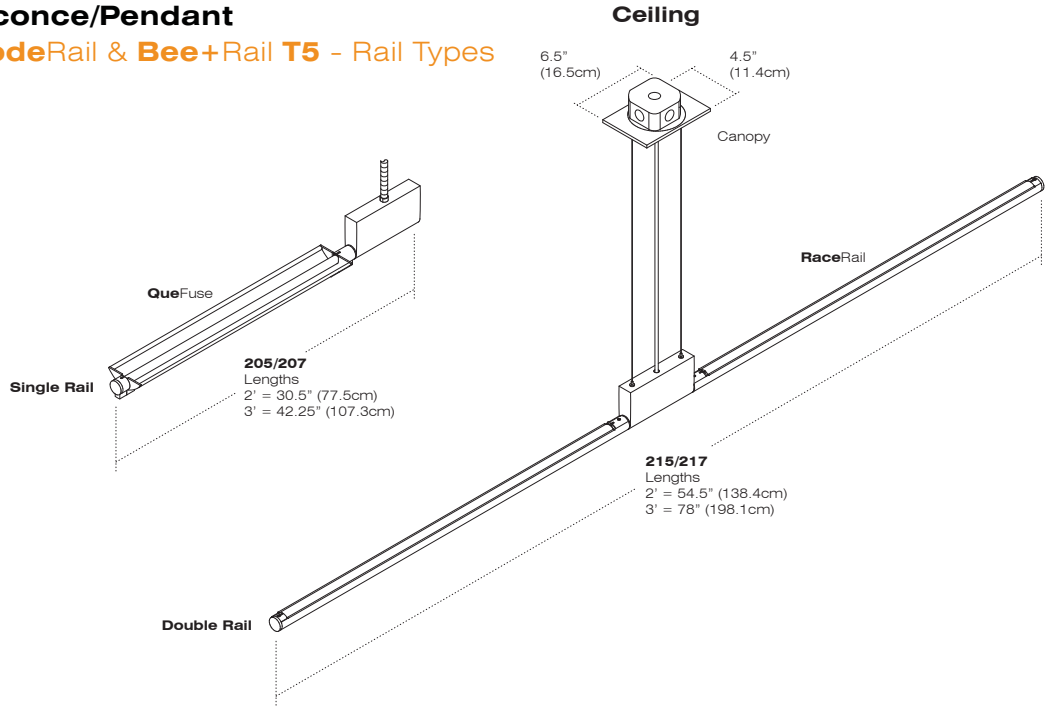




200 Series
Sconce/Pendant
VodeRail T5 - Specification Sheet


Specification Code

Vode Code	Rail Type	Length	Mounting	Ballast Location	Ballast Type	Voltage	Lamp Type	Finish	Lens/Baffle	Options
205 215	2	3	4	5	6	7	8	9	10	11


1	<p>Vode Code 205 single rail 215 double rail</p>									
2	<p>Rail Type BE BeeRail BX BoxRail QU QueRail RR RaceRail WL WingRail – left WR WingRail – right</p>									
3	<p>Length Single Rail 2 2' (30.5" overall length) 3 3' (42.25" overall length) Double Rail 4 4' (2 x 2', 54.5" overall length) 6 6' (2 x 3', 78" overall length)</p>									
4	<p>Mounting CW surface SS suspension*</p> <p>*available for double rail only (215) Standard suspension hardware includes 6' clear power cord, 6' cable and 4.5" x 6.5" jbox cover.</p>									
5	<p>Ballast Location Integral Ballast IB no jbox cover plate* IC with jbox cover plate Remote Ballast RB no jbox cover plate* RC with jbox cover plate</p> <p>*not available for suspension (SS)</p>									
6	<p>Ballast Type Integral Ballast I instant start Remote Ballast A programmed start B 10% dimming – Lutron Eco-10 C 1% dimming – Lutron Hi-lume D 1% DALI dimming – Osram E 10% DALI dimming – Lutron Ecosystem F 1% dimming (0 – 10v) G bi-level dimming H 1% DALI dimming – Lutron Hi-Lume 3D X other (please specify)</p> <p>Maximum remote distance from 2' to 18' depending on ballast type. See Ballast Chart on page 144.</p>									
7	<p>Voltage 1 120v 3 347v* 2 277v 4 220v*</p> <p>*remote ballast only</p>									
8	<p>Lamp Type HE high efficiency T5 2' = 14w 3' = 21w HO high output T5 2' = 24w 3' = 39w (available with remote ballast only)</p>									
9	<p>Finish A brushed aluminum (standard) WH white powdercoat BL black anodized</p>									
10	<p>Lens/Baffle 0 none 1 prismatic lens (option for QU and WG only, standard on RR and BX) B cross baffle (available for WG and QU only)</p> <p>Please refer to Bee+Rail specification guide for accessory reflectors for BeeRail.</p>									
11	<p>Options 0 none 1 on/off toggle switch (IB ballast only) L lamps provided (specify color temperature) CP6 6' 18/3 clear power cord and plug</p>									




BeeRail




BoxRail




QueRail



RaceRail



WingRail - R



WingRail - L



200 Series


Sconce/Pendant

Bee+Rail T5 - Specification Sheet


Specification Code

Vode Code	Rail Type	Length	Mounting	Ballast Location	Ballast Type	Voltage	Lamp Type	Finish	Bee+Rail	Options
205 215	BE	3	4	5	6	7	8	9	10	11


1	Vode Code 205 single rail 215 double rail									
2	Rail Type BE Bee+Rail (specify Bee+ diffuser/reflector in step 10)									
3	Length Single Rail 02 2' (30.5" overall length) 03 3' (42.25" overall length) Double Rail 22 4' (2 x 2', 54.5" overall length) 33 6' (2 x 3', 78" overall length)									
4	Mounting CW surface SS suspension* *available for double rail only (215) Standard suspension hardware includes 6' clear power cord, 6' cable and 4.5" x 6.5" jbox cover.									
5	Ballast Location Integral Ballast IB no jbox cover plate* IC with jbox cover plate Remote Ballast RB no jbox cover plate* RC with jbox cover plate *not available for suspension (SS)									
6	Ballast Type Integral Ballast I instant start Maximum remote distance from 2' to 18' depending on ballast type. See Ballast Chart on page 144. Remote Ballast A programmed start B 10% dimming - Lutron Eco-10 C 1% dimming - Lutron Hi-lume D 1% DALI dimming - Osram E 10% DALI dimming - Lutron Ecosystem F 1% dimming (0 - 10v) G bi-level dimming H 1% DALI dimming - Lutron Hi-Lume 3D X other (please specify)									
7	Voltage 1 120v 2 277v 3 347v* 4 220v* *remote ballast only									
8	Lamp Type HE high efficiency T5 2' = 14w 3' = 21w HO high output T5 2' = 24w 3' = 39w (available with remote ballast only)									
9	Finish A brushed aluminum (standard) WH white powdercoat BL black anodized									
10	Bee+Rail BB BoxBaffle* BF BeeFuse BP BowPerf HP HalfPerf QF QueFuse WP WingPerf *recommended for suspension or horizontal mount only									
11	Options 0 none 1 on/off toggle switch (IB ballast only) L lamps provided (specify color temperature) CP6 6' 18/3 clear power cord and plug									




BoxBaffle




BeeFuse




BowPerf



HalfPerf



QueFuse



WingPerf